

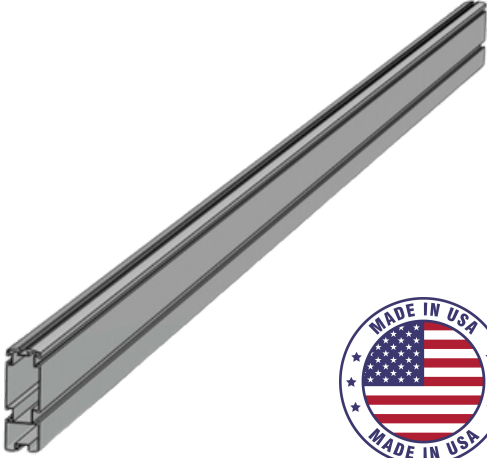
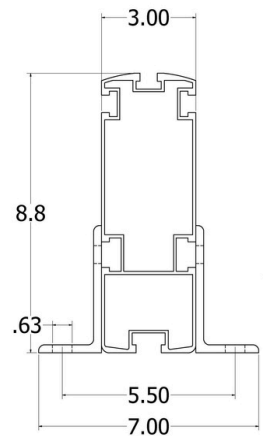


9X3 DEEP STRUT SPECIFICATION



Universal - FSS Deep Strut (FSS) was developed as a main solar support beam to span large distances such as across parapet walls for residential structures and for spanning across major beams in commercial buildings.



PHYSICAL CHARACTERISTICS	Dimensions: 8.8" High x 3" Wide Weight: 4.1 Lbs/Ft.
STRUCTURAL CHARACTERISTICS	Syymin = 2.97 in ³ Iyymin = 4.45 in ⁴ ryymin = 1.16 in Szzmin = 7.74 in ³ Izzmin = 34.92 in ⁴ rzzmin = 3.23 in Ag = 3.36 in ² Ae = 3.36 in ²
MATERIAL	Extruded Aluminum, 6061-T6/6005-T6
SUPPORT SPAN CAPACITY	Up to 25 Ft. -See Tables
ATTACHMENT METHOD	Angle Bracket to Parapet Walls Post to Roof or Parapet Walls Lag Bolt or embedded rod – 1/2"
WARRANTY	20 Years



3516 MASSACHUSETTS AVE NW
WASHINGTON DC 20007



Universal Renewables LLC
T- 202.956.8565

For more information, please contact us via our social media or visit our official website:



WWW.UNIVERSALALUMINUMPRODUCTS.COM
info@universalaluminumproducts.com